


Size:	L1	L2	H1	H2
½", ½" LF	2.75	3.9	2.0	1.9
¾" LF	2.9	4.2	2.0	1.9
¾"	3.4	4.6	2.3	2.1
1"	4.6	6.1	2.6	3.1
1¼"	4.9	6.5	2.6	3.1

See back for dimensions with actuators

### Minimum operating differential pressure

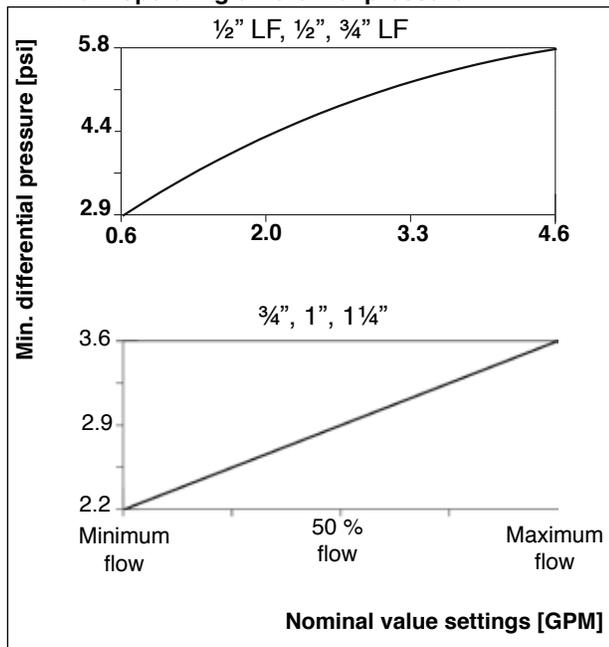

1

Oventrop Corporation  
PO Box 789  
East Granby, CT 06026  
Phone: (860) 413-9173  
www.oventrop-us.com

### Product specification

#### Function:

The Oventrop pressure independent control valve “Cocon Q” maintains a valve authority of 100% and the desired flow over a wide range of differential pressures. The “Cocon Q” is ideal for variable flow applications and makes selection and commissioning easy. Select the valve with the flow range that satisfies the desired flow rate, and set the design flow rate on site with a quick turn of the hand wheel.

The valve is used for the hydronic balancing and temperature control of appliances or sections of the system in chilled ceiling, fan-coil, convector, central heating, and surface heating systems.

#### Performance data:

Maximum working temperature:	250°F (120°C)
Minimum working temperature:	14°F (-10°C)
Maximum working pressure:	232 psi (16 Bar)
Maximum differential pressure:	60 psi (4 Bar)
Minimum differential pressure:	2.2 to 6 psi (0.15 to 0.4 Bar)
Flow accuracy:	+/- 10%
Positioning accuracy:	0.1 GPM
Close-off pressure with 1012705/06:	232 psi

#### Item numbers:

Size	Flow range	Male/female ports	Male ports
½" LF	0.13 - 0.9 GPM	167 60 04	167 60 64
½"	0.7 - 4.6 GPM	167 62 04	167 62 64
¾" LF	0.7 - 4.6 GPM	167 60 06	167 60 66
¾"	0.8 - 5.7 GPM	167 61 06	167 61 66
1"	1.3 - 8.8 GPM	167 61 08	167 61 68
1¼"	2.6 - 15.8 GPM	167 61 10	167 61 70

#### Accessories:


Lead sealing locking wire:	108 90 91
----------------------------	-----------

### 24V actuators with M30x1.5 connection


Item number	Model	Operating behavior (control signal)	Medium floating time	Maximum fluid temperature [F]	Allowable installation position	Actuator addition to H1 [in]
101 27 06	Electromotive	0-10 V with feedback	~ 15 s/mm	203	Any, but not upside down	1.9
101 27 05	Electromotive	On/Off (2-point), Floating (3-point), 0-10 V (proportional)				



### Proportional actuator characteristic lines

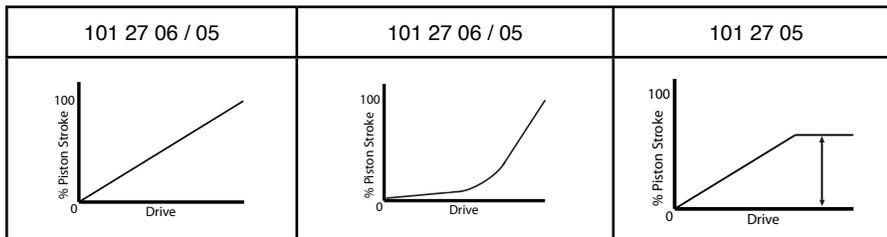

### Valve characteristic line

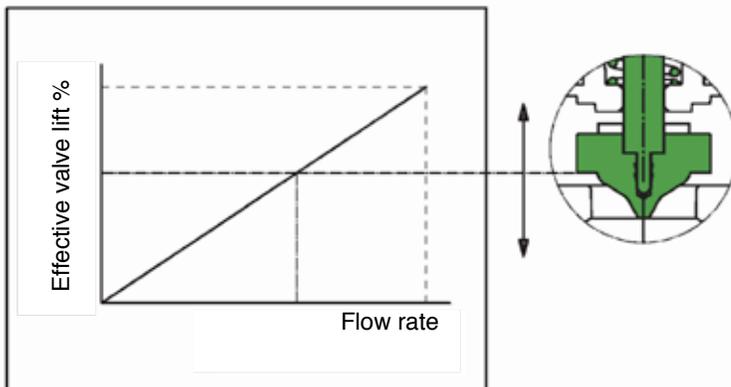

### Construction:

The “Cocon Q” has a brass body and is alloyed to resist dezincification (DZR). No dielectric fittings are required for installation. The valve stem is stainless steel and the flexible components are made of EPDM and PTFE. The “Cocon Q” offers a hand wheel mounted opposite and inline with the actuator. The actuator and hand wheel are oriented 15 degrees from vertical to allow for easier operation. The valve has integral self-sealing ports for measuring differential pressure and fluid temperature using standard pressure and temperature test probes. Test ports are located perpendicular to the hand wheel, on the same side of the valve, and are replaceable with blind plugs if not needed. Test ports are spaced 1.0 inch apart and extend 1.5 inches from the valve body. The hand wheel is adjustable while the valve is in operation with the actuator installed. The “Cocon Q” includes a locking clip stop to ensure the balanced position while in operation and to prevent hand wheel repositioning after setting.