

“LFCS” calibrated balancing valve  
flow specifications




“Lead free CS”

NPT Connection	Solder Connection	DN	Size	Recommended Minimum Flow	Recommended Maximum Flow
				<b>GPM (l/s)</b>	
1660904	1660951	15	½"	<b>0.7</b> (0.044)	<b>3</b> (0.189)
1660906	1660952	20	¾"	<b>1.3</b> (0.082)	<b>5.9</b> (0.372)
1660908	1660953	25	1"	<b>3.4</b> (0.215)	<b>15.4</b> (0.972)
1660910	1660954	32	1¼"	<b>7.2</b> (0.454)	<b>32.3</b> (2.038)
1660912	1660955	40	1½"	<b>11.5</b> (0.726)	<b>51.3</b> (3.237)
1660916	1660956	50	2"	<b>17</b> (1.073)	<b>76</b> (4.795)


# oventrop

## DN15 - 1/2"

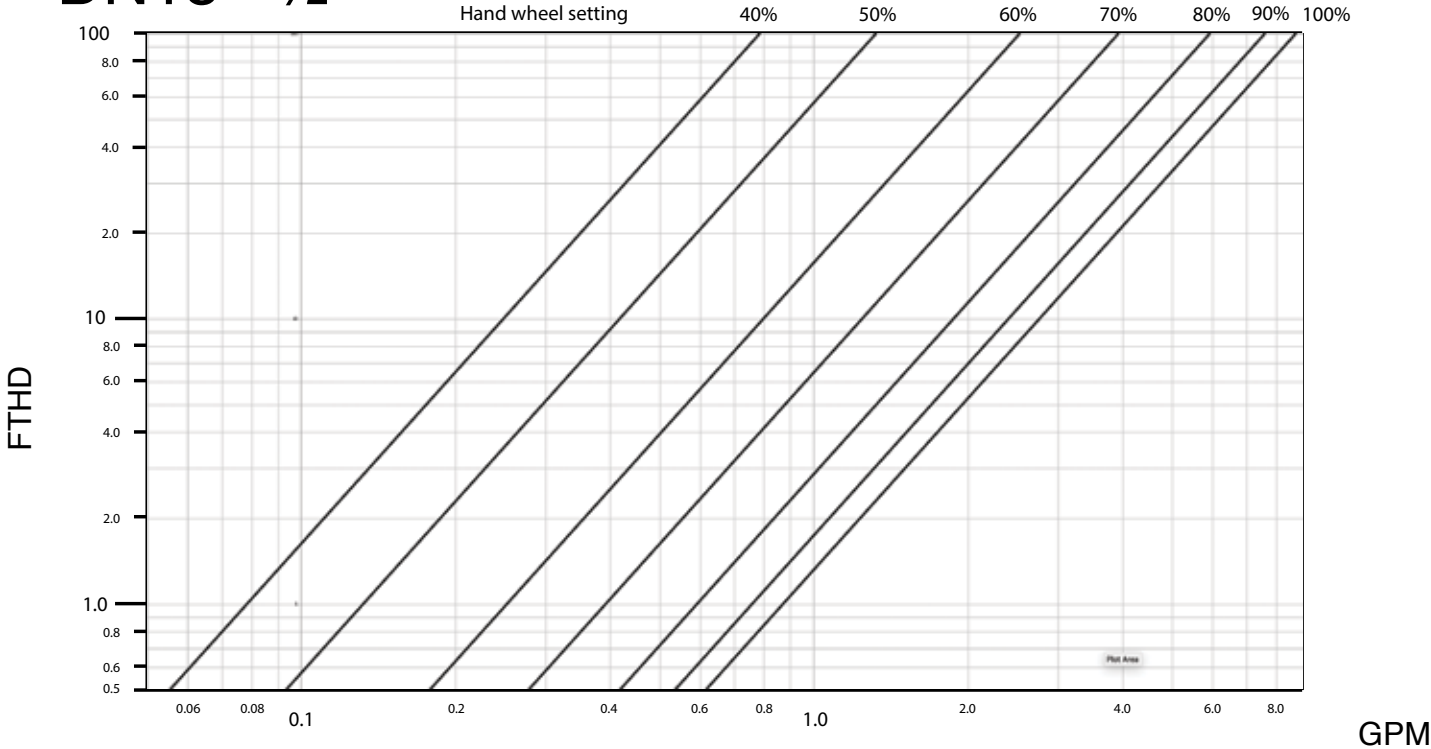


It is not recommended to use the valves below the lowest hand wheel setting listed above.


## DN20 - 3/4"

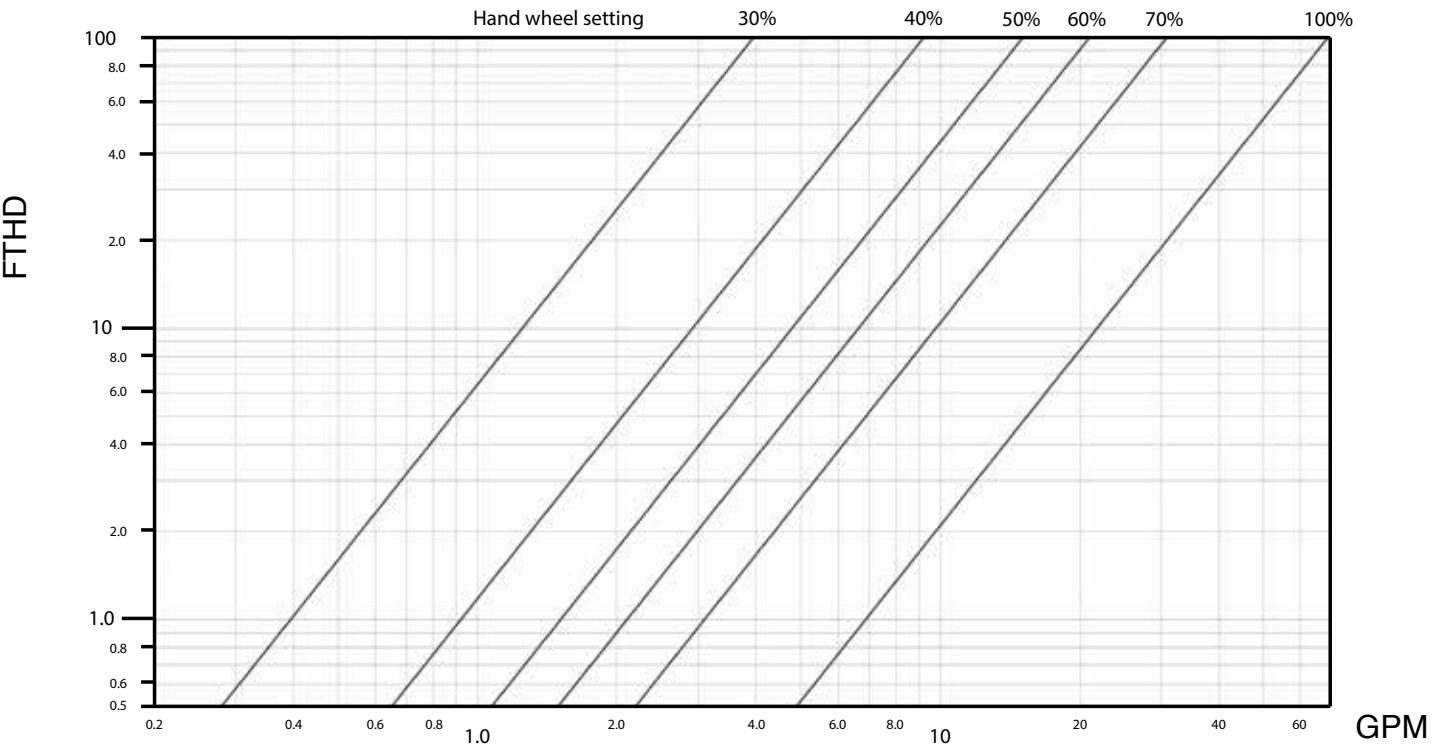

# DN25 - 1"

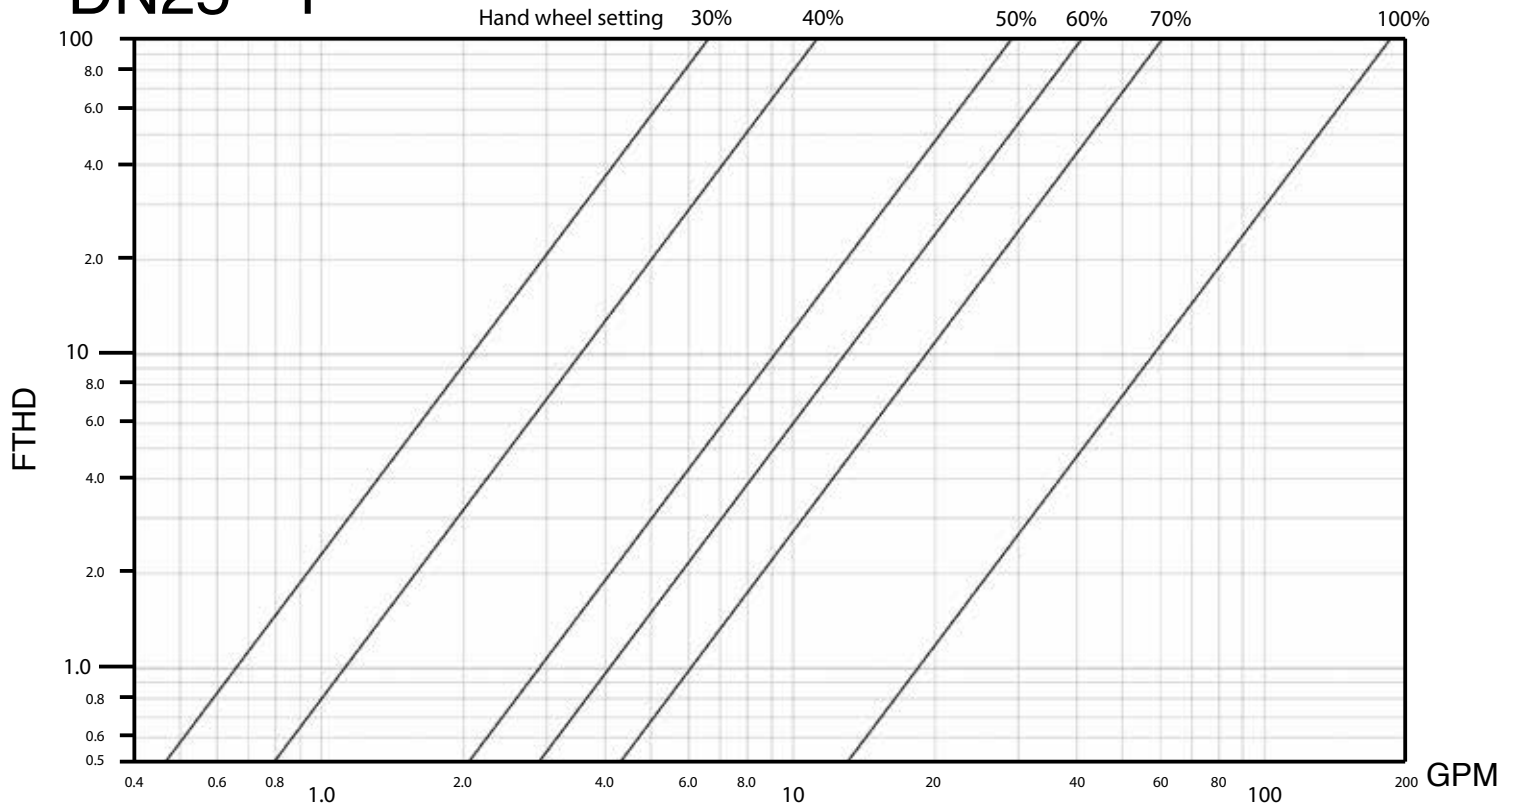


# DN32 - 1 1/4"

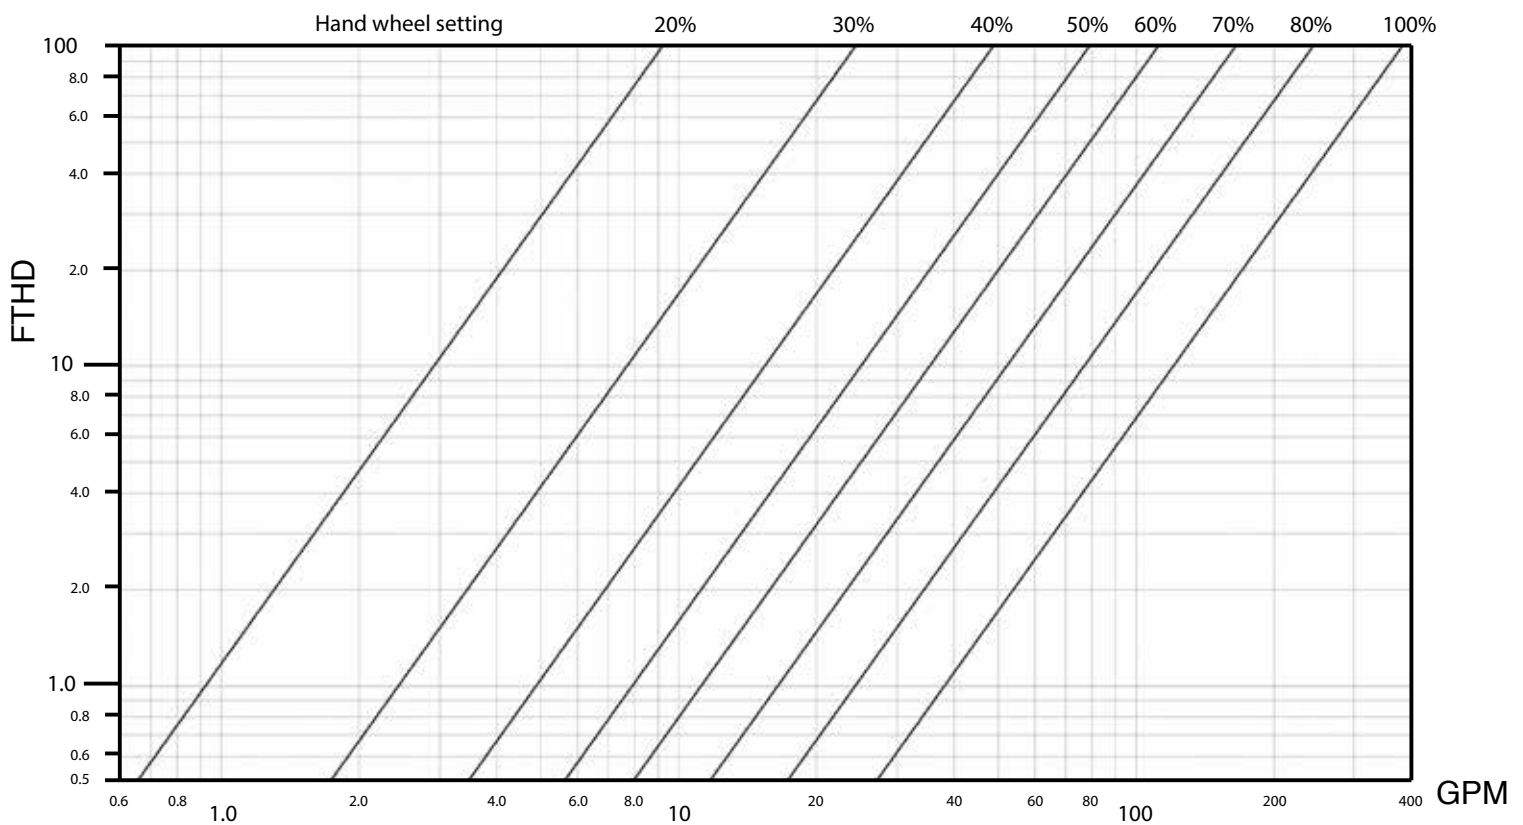

# oventrop

## DN40 - 1 1/2"

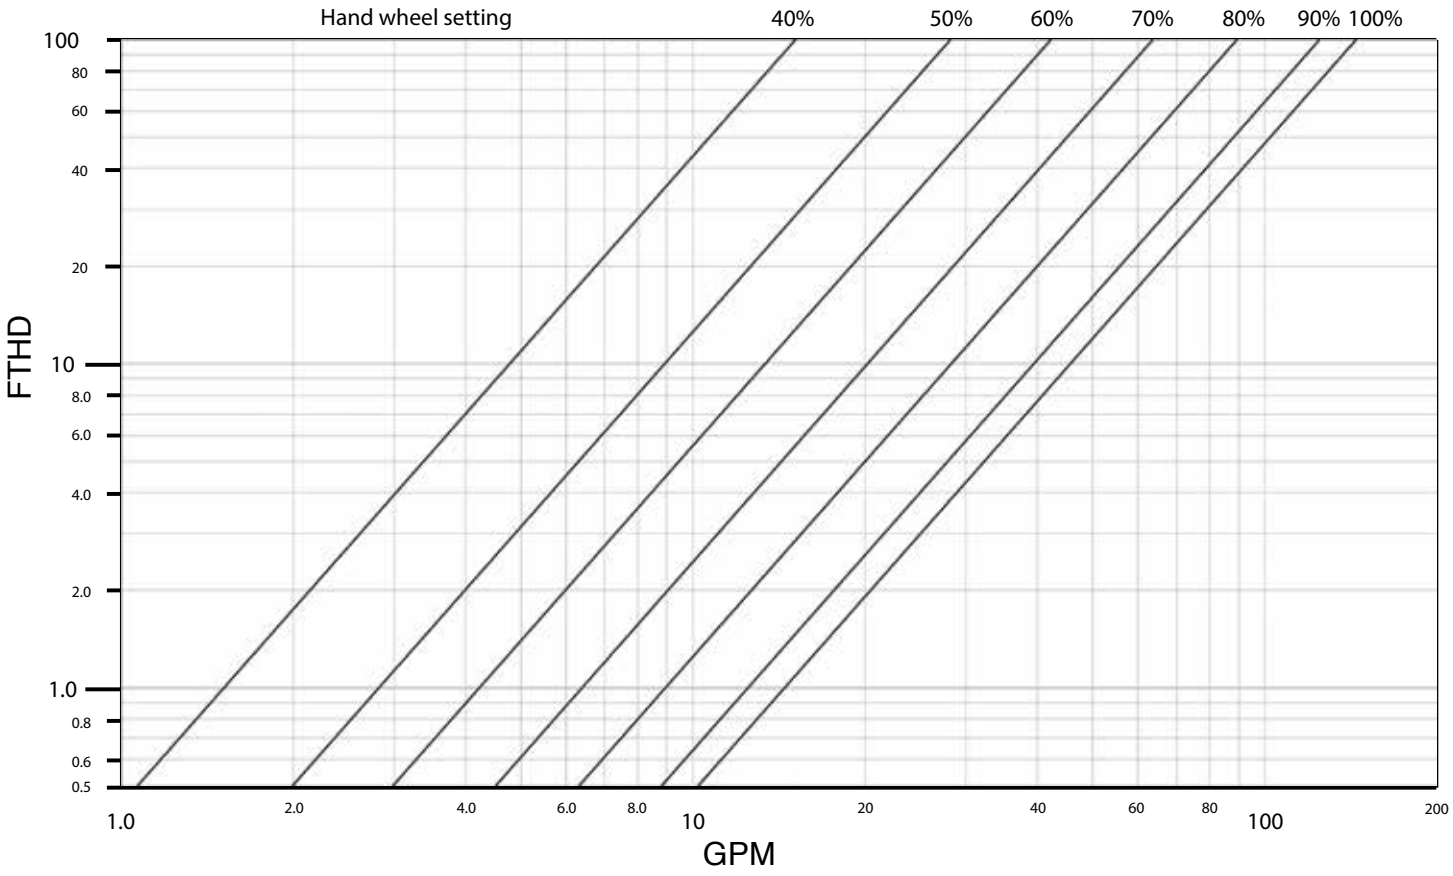

# DN50 - 2"

