

Job Name: \_\_\_\_\_

Submitted by: \_\_\_\_\_ Date: \_\_\_\_\_

\_\_\_\_\_


Spec Section: \_\_\_\_\_

Job Location: \_\_\_\_\_

Engineer/Architect: \_\_\_\_\_

\_\_\_\_\_

Approval: \_\_\_\_\_ Date: \_\_\_\_\_

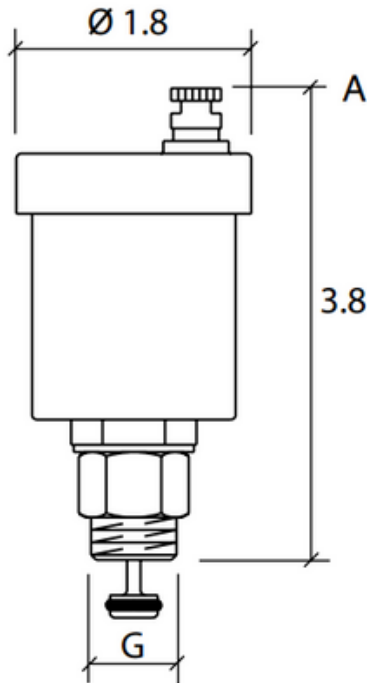

**Setting instructions:**

The Oventrop automatic air vent is used for the elimination of air which is generated during operation of the heating system.

The 1/2-inch automatic air vent can be cleaned and replaced under working conditions without pressure discharge from system because of the automatic shut-off device.

The air vent must be installed vertically. The air vent is a float type.

Body made of brass.  
 Temperature range: 32°F to 240°F  
 Maximum pressure: 150 psi  
 Maximum glycol concentration: 30%

**Models:**

1/8" air vent      **108 83 81**

1/2" air vent      **108 83 84**

Item no.	G	A	Automatic shut-off device
108 83 81	1/8-inch male NPT	3.2	Without
108 83 84	1/2 inch male NPT	3.8	With